

A0710510 GARDA-10WW & Pin

1x 10W Warm-White 30° COB LED

Technical specifications:

Light source:	warm-white (3000K) COB LED
Reflector:	30° Symmetric, efficiency < 90%
Typical luminance:	638Lm
Typical consumption:	12W (53.17Lm/W)
Housing & Frontring:	Die casting grey powdercoated aluminium T=75µm Adhesion of ISO class 1/ASTM class 4B 4mm step tempered white coating glass. Molding shaped silicone double seal
Gasket:	IP-68 PG-9 copper & nickel coated
Cable gland:	2 mtr H05RN-F 3x 1.0mm ² (high voltage)
Power cable:	120-240VAC
Input Voltage:	1.2 Kg
Weight:	102 x 1180 x 481 mm
Dimensions:	IP-65
Classification:	



Spike: PVC

Attention: This high power LED fixture can not be installed under water




Height	Vert. Spread 26.4°	Horiz. Spread 26.8°	Beam Width V H	Center beam LUX
1m			0.45m 0.5m	1829 Lx
2m			0.9m 1.0m	457 Lx
4m			1.9m 1.9m	114 Lx
6m			2.8m 2.9m	51 Lx
8m			3.8m 3.8m	29 Lx


120V 230V DUAL	Class I	638Lm	WW 3000K	27° Symm. LED-Lens
50/60Hz	Kg 1.2	Outdoor	IP IP65	IES-File available

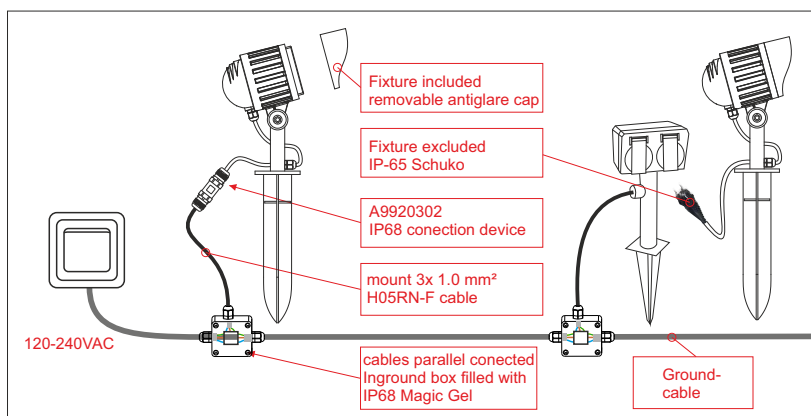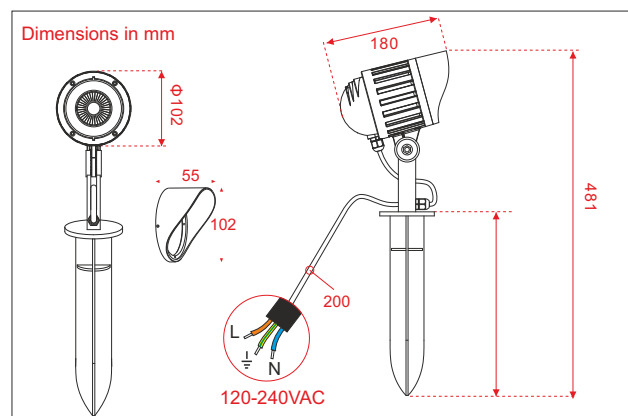

Light Distribution Curve [Unit: cd]

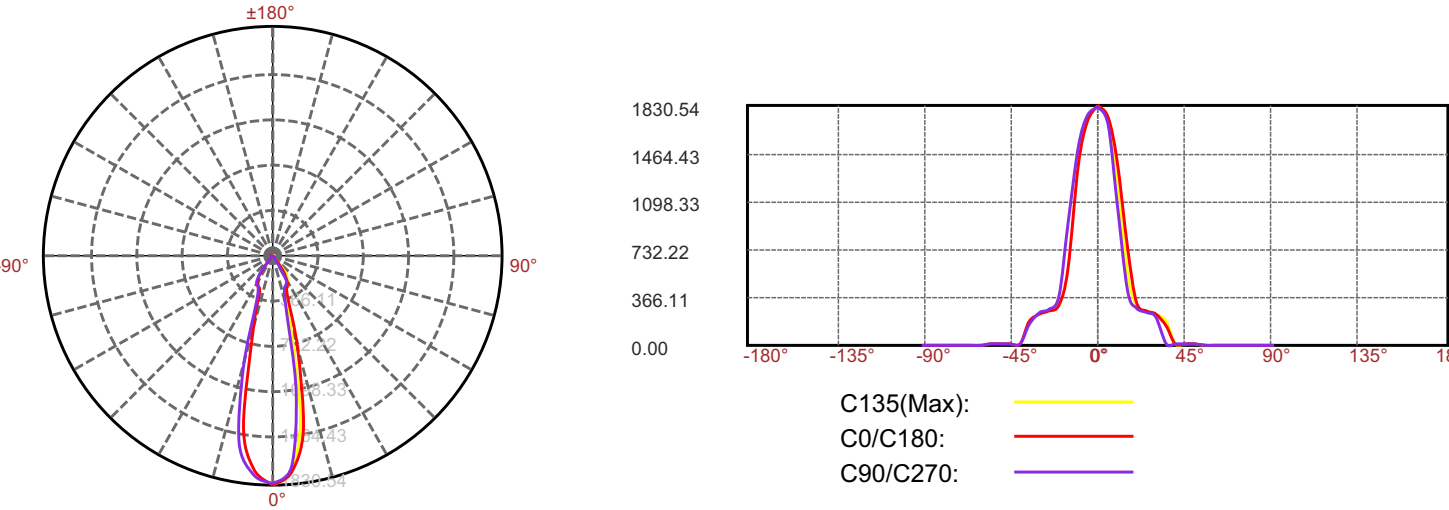

Lux distance Curve

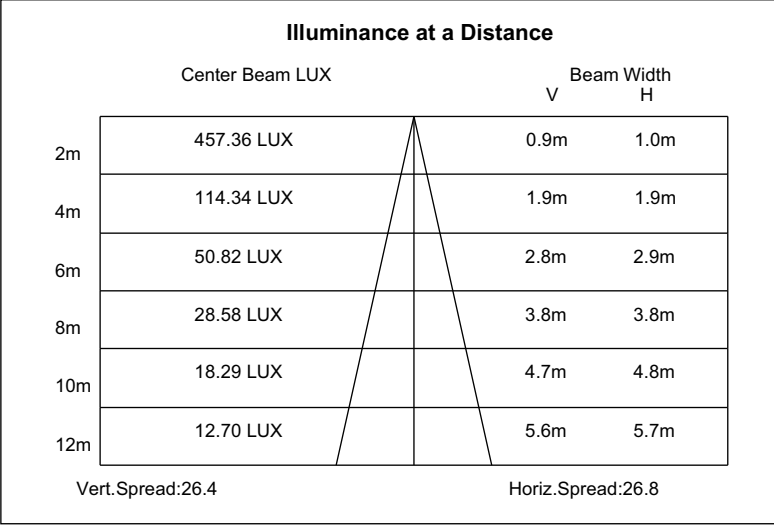

ISO-Intensity(V-H)

